



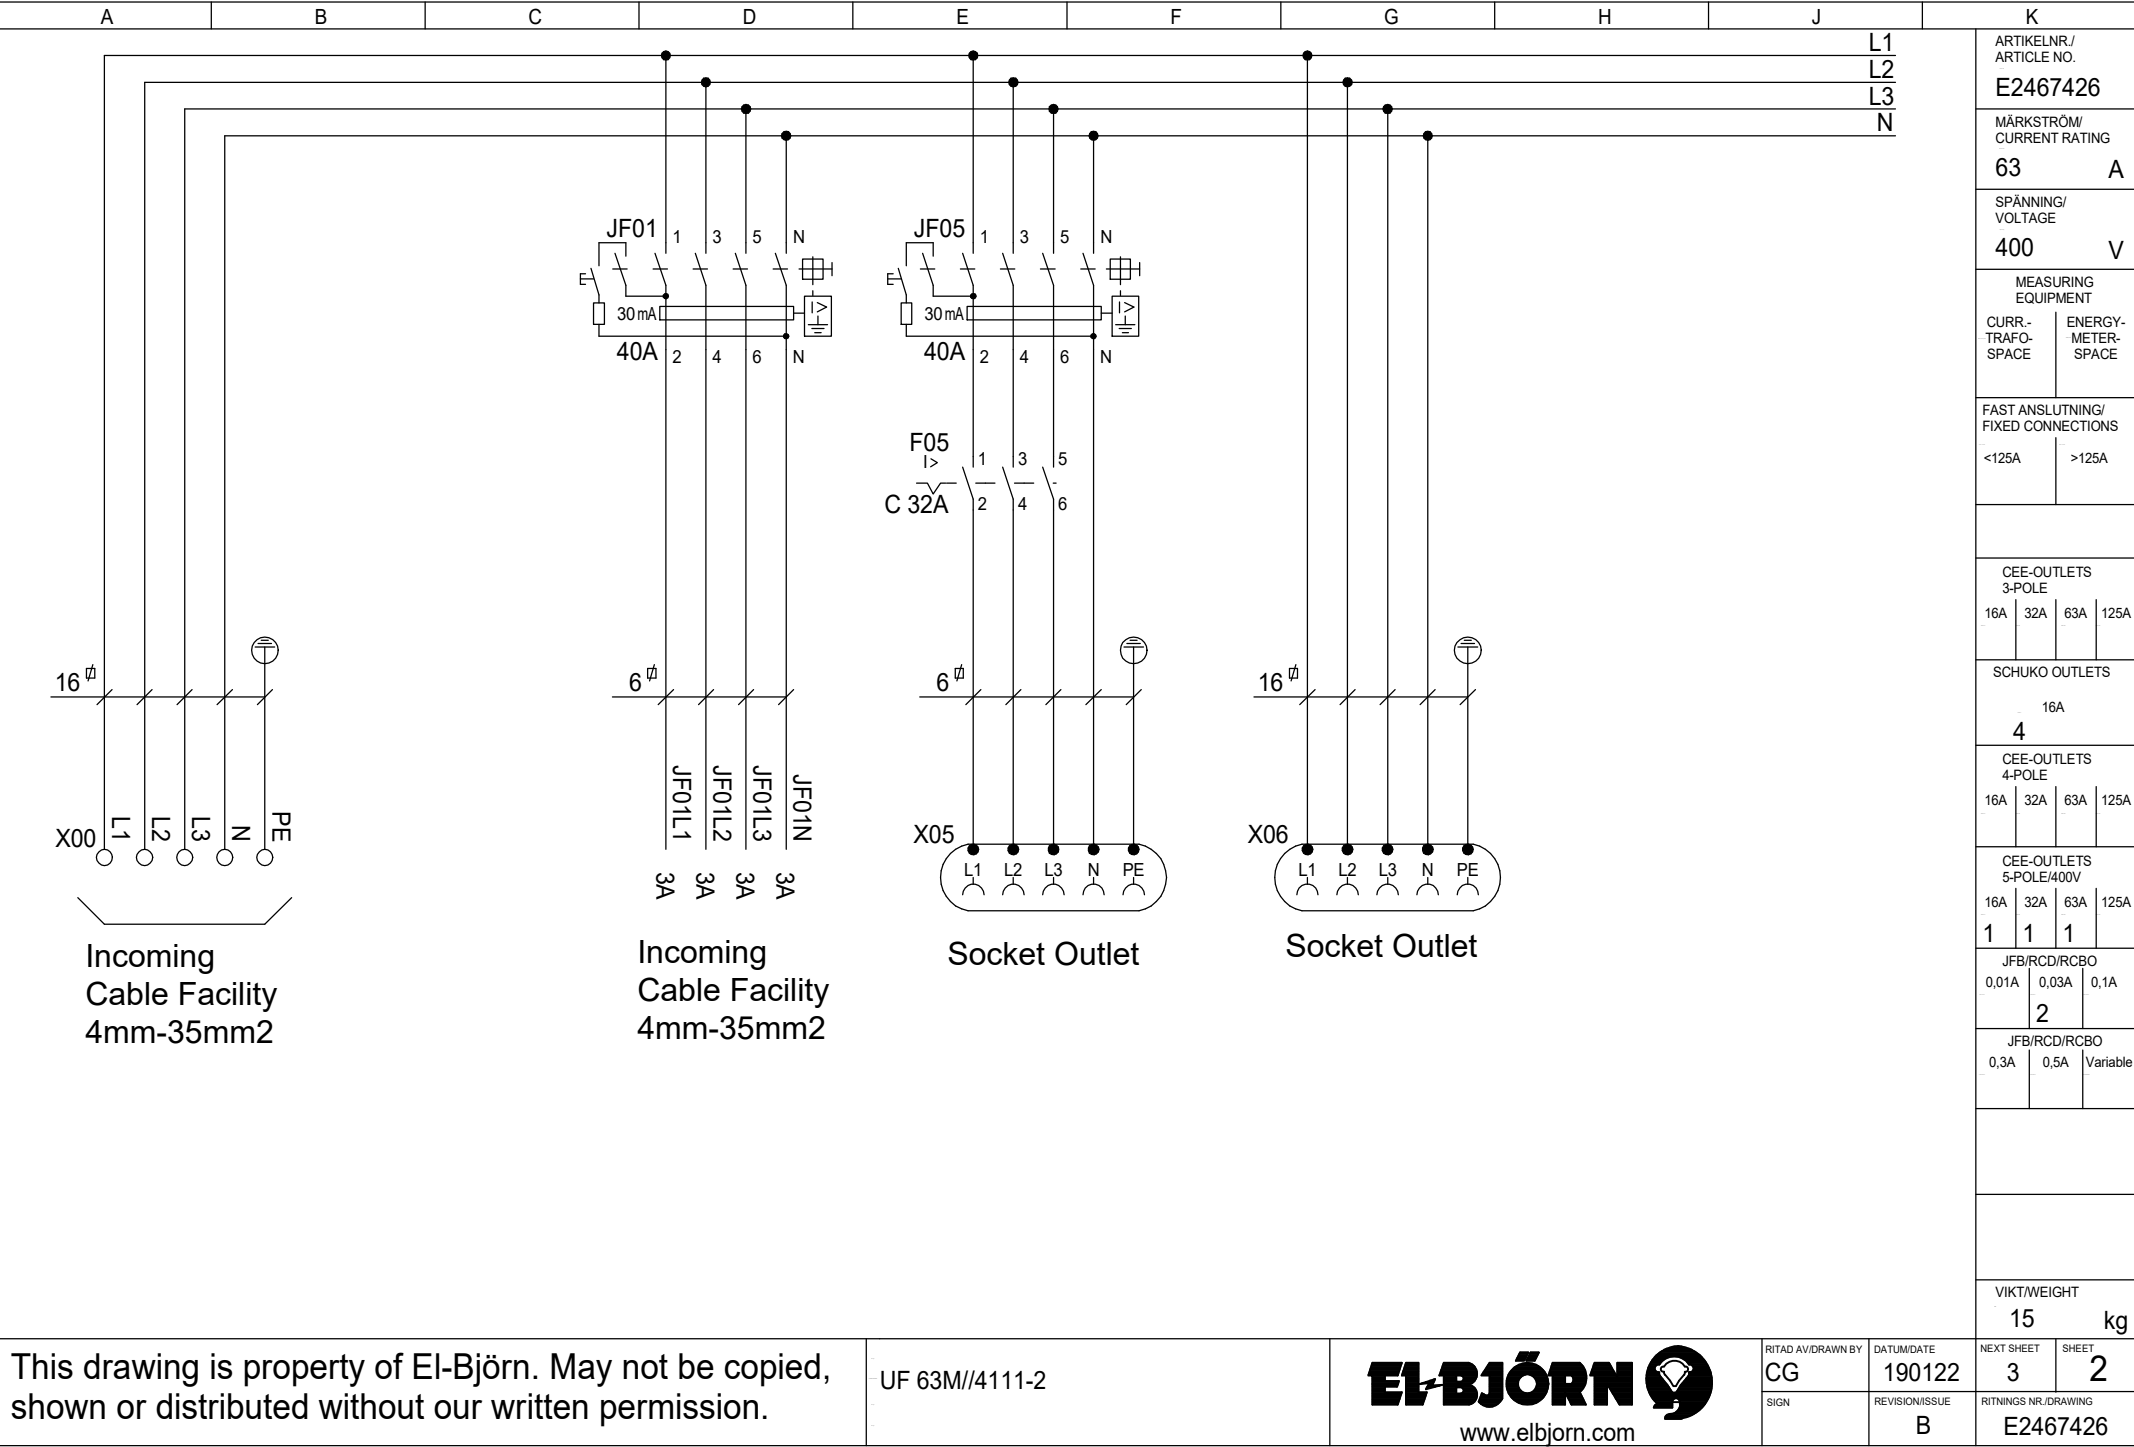

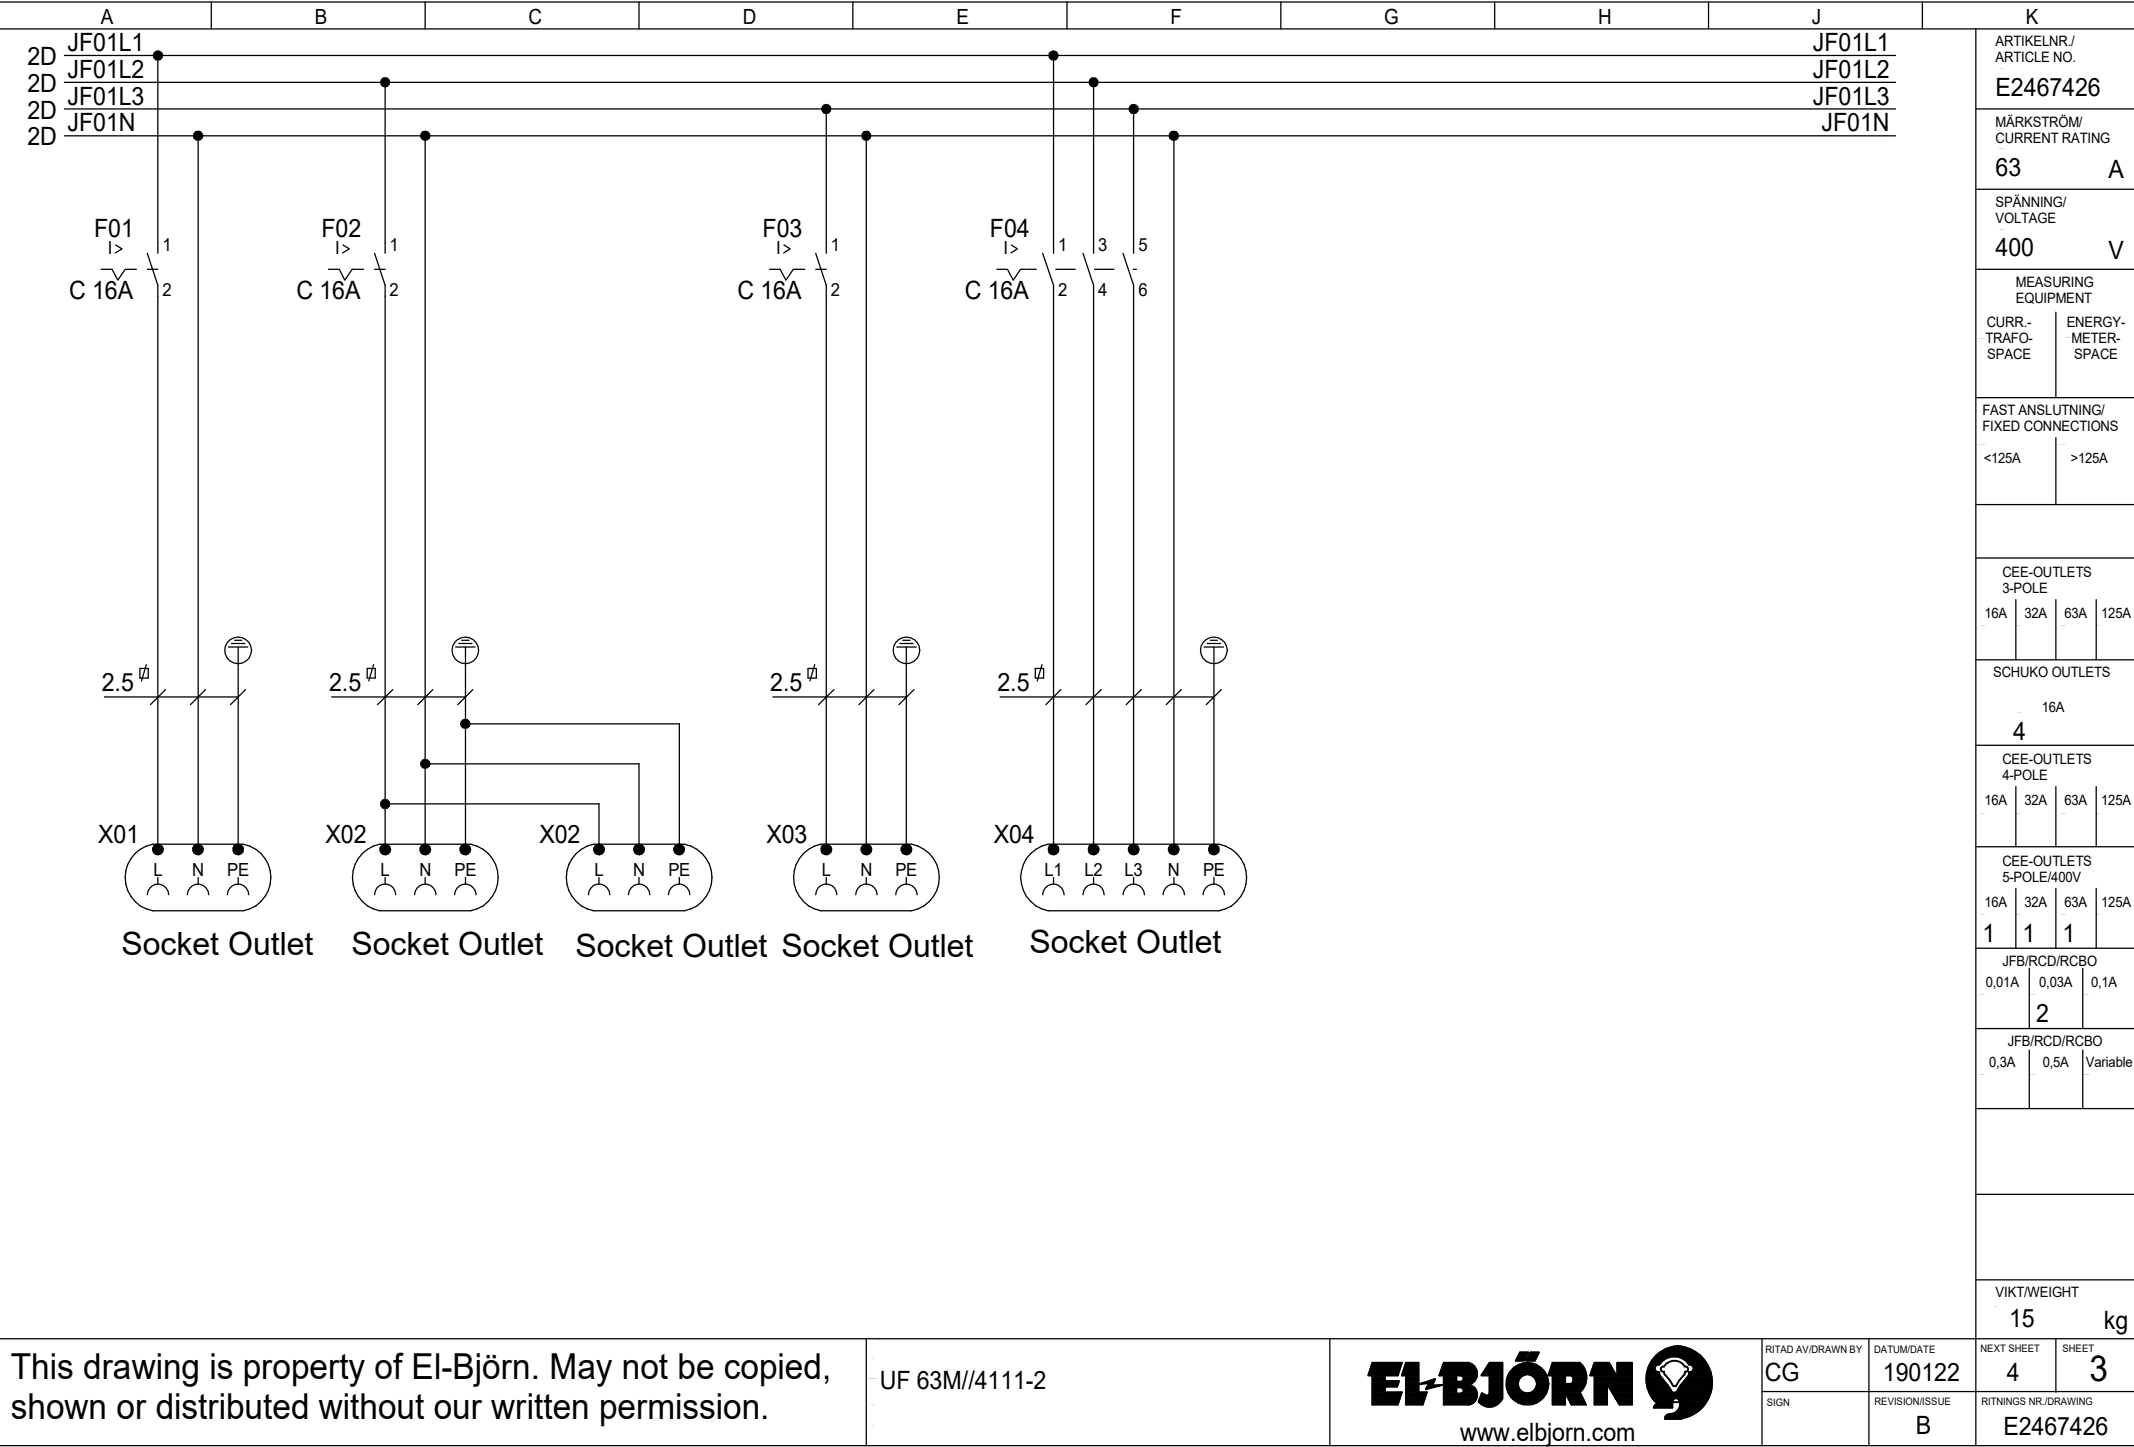

A		B		C		D		E		F		G		H		J		K	
PC.	Position	Description	Type	Manufacturer	Data	Article No.	E-number(SE)	ARTIKELNR./ARTICLE NO. E2467426											
1	-	Kapsling	UF 63M	El-Björn	295 x 505 x 245			MÄRKSTRÖM/ CURRENT RATING 63 A											
3	F01-F03	MCB	iC60N 1P 6kA	Schneider Electric	C 16A	A9F04116	2112043	SPÄNNING/ VOLTAGE 400 V											
1	F04	MCB	iC60N 3P 6kA	Schneider Electric	C 16A	A9F04316	2112073	MEASURING EQUIPMENT CURR.- TRAFO- SPACEENERGY- METER- SPACE											
1	F05	MCB	iC60N 3P 6kA	Schneider Electric	C 32A	A9F04332	2112076												
2	JF01, JF05	RCD	iID 4P A	Schneider Electric	40A, 30mA	A9Z21440	2164955	FAST ANSLUTNING/ FIXED CONNECTIONS <125A>125A											
3	X00	Universalklämma	KE 66	Ensto	AL/CU 2//6-50mm²	KE 66	2673561	CEE-OUTLETS 3-POLE 16A32A63A125A											
1		Universalklämma	KE 66.2	Ensto	AL/CU 2//6-50mm²	KE 66.2	2673562												
1		Universalklämma	KE 66.3	Ensto	AL/CU 2//6-50mm²	KE 66.3	2673563	SCHUKO OUTLETS 16A 4											
4	X01-X03	Schukouttag	Typ F	Mennekes	230V, 16A, IP54	11020EB													
1	X04	Uttag	416RU6	ABB	16A, 400V, IP44	2CMA192642R1000	2416633	CEE-OUTLETS 4-POLE 16A32A63A125A											
1	X05	Uttag	432RU6	ABB	32A, 400V, IP44	2CMA192658R1000	2416660												
1	X06	Uttag	463RU6	ABB	63A, 400V, IP44	2CMA192664R1000	2416680	CEE-OUTLETS 5-POLE/400V 16A32A63A125A 111											
								JFB/RCD/RCBO 0,01A0,03A0,1A 2											
								JFB/RCD/RCBO 0,3A0,5AVariable											
								VIKT/WEIGHT 15 kg											
								RITAD AV/DRAWN BY CG											
								DATUM/DATE 190122											
								REVISION/ISSUE C*											
								NEXT SHEET SHEET 4											
								RITINGS NR./DRAWING E2467426											

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UF 63M//4111-2

EL-BJÖRN

www.elbjorn.com

RITAD AV/DRAWN BY
CG

SIGN

DATUM/DATE
190122

REVISION/ISSUE
C*

NEXT SHEET
SHEET
4

RITINGS NR./DRAWING
E2467426